

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018936 A1

(51) International Patent Classification⁷: **F22B 1/28**,
D06F 75/14, A61H 33/12

(21) International Application Number:
PCT/IB2003/003714

(22) International Filing Date: 31 July 2003 (31.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/SG02/00202 26 August 2002 (26.08.2002) SG

(71) Applicant (for all designated States except US): **KONIN-
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VALIYAMBATH
KRISHNAN**, Mohankumar [IN/SG]; c/o Prof. Holstlaan
6, NL-5656 AA Eindhoven (NL).

(74) Agent: **BOS, Kornelis, S.**; Philips Intellectual Property
& Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven
(NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii)) for the following designations AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES,
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH,

[Continued on next page]

(54) Title: **ELECTRIC STEAMING DEVICE**

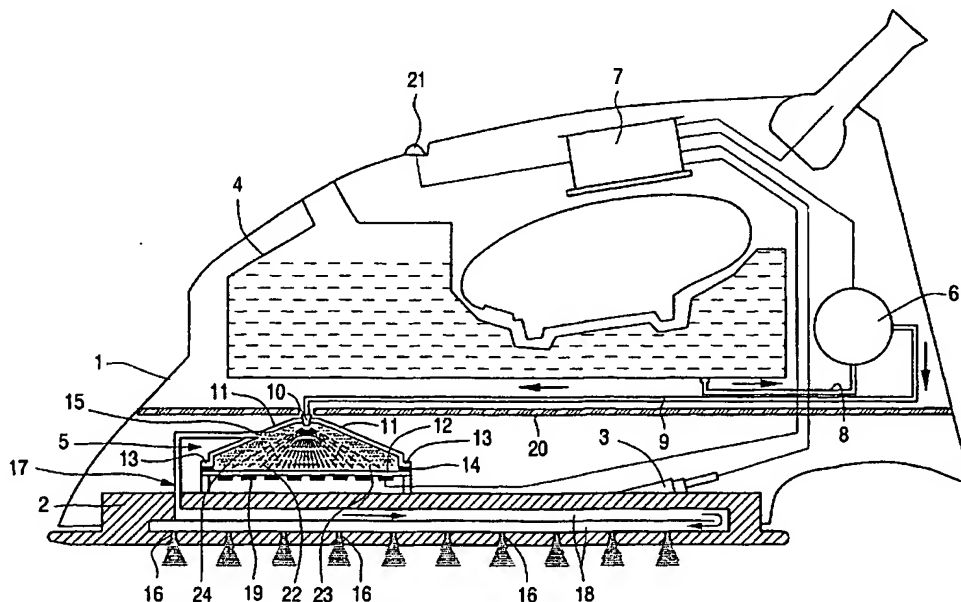

(57) Abstract: The invention relates to an electric steaming device, such as a steam iron or a facial sauna, having a steam generator (5) with a heatable base (12). According to the invention, water is sprayed onto the heatable base (12) via a nozzle (10) to generate steam (22). Some of the sprayed water (23) is mixed with the steam and taken along with the steam towards the steam outlet opening (16). The advantage is a high wet steam or vapor (24) production rate.



PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

Electric steaming device

The invention relates to an electric steaming device comprising a housing, a steam generator having a base, heating means for heating said base of the steam generator, a water reservoir, at least one steam outlet opening, means for feeding water from the water reservoir into the steam generator, and at least one passageway for conveying steam from the steam generator towards the at least one steam outlet opening.

Such a steaming device is known, for example, from US 3263350 which describes an electric steam iron. In this iron the means for feeding water from the water reservoir into the steam generator comprises a valve which permits controlled amounts of water in the form of droplets to enter the chamber of the steam generator by gravity flow. The actually delivered quantities of steam depend on the one hand on the amounts of water released by the valve and thus depend on the extent of the valve opening which can be controlled by the user, and on the other hand on the temperature of the base which is thermostatically controlled. Water released by the valve drips on the base in one location, and from this location it flows by gravity along the base for evaporation. Steam generated in this way is generally rather dry. For an easy removal of wrinkles, a garment should be moistened efficiently, which means that a good ironing result requires the steam discharged from the outlet openings of an iron to contain more water than obtained by the usual steam generation. From US 2762143 it is known to insert water into the generated steam in order to obtain such a wet steam. The water is introduced into a steam passage outside the steam generator. It is desirable to generate wet steam or water vapor also for a device like a facial sauna as described in WO 00/66063.

It is an object of the invention to increase the steam production rate. It is another object of the invention to generate a wet steam.

According to the invention, these objects are achieved in that the means for feeding water into the steam generator comprises at least one spray nozzle for spraying water

onto the base of the steam generator. The advantage of this arrangement is that water is sprayed over a relatively large surface area of the base with very fine water droplets, and thus steam is continuously generated over a large surface. The result is that the steam production is much higher per unit time than obtained by the known devices. Some of the sprayed water in the form of very fine droplets is mixed with and taken along with the generated steam. In this way a kind of wet steam, also referred to as mist, is obtained which is, for example, favorable for moistening garments in an ironing process or for obtaining vapor for a facial treatment or for steam cleaning. Contrary to known devices (US 2762143), wet steam is already generated inside the steam generator. Another advantage is that steaming starts almost immediately after the spray of water has been introduced into the steam generator.

In a preferred embodiment of the steaming device, the heating means for heating the base of the steam generator comprises a resistive track of a thick-film printed circuit. A uniform heating of the base is obtained with a thick-film heating track applied to the base. The heated base reaches the desired temperature for steaming very rapidly. Moreover, the construction of the steam generator can be made lightweight.

In a further preferred embodiment, the means for feeding water into the steam generator comprises an electric pump. Dosing of the amount of water to the nozzle and thus the amount of water spray can be easily adjusted by means of an electric pump. Also the location of the water reservoir relative to the steam generator can be freely chosen and is not dependent on gravity.

An example of the steaming device according to the invention is a steam iron having a soleplate, heating means for heating the soleplate, a plurality of steam outlet openings provided in the soleplate, wherein the passageway for conveying the generated steam to the steam outlet openings comprises at least one steam distribution channel provided in the heatable soleplate. Such a steam iron has a separate heating means, preferably also a resistive track of a thick-film printed circuit, while the temperature can be controlled independently of the heating means for heating the base of the steam generator.

Another example of the steaming device is a facial sauna.

These and other aspects of the invention will now be elucidated with reference to the embodiments described hereinafter.

Fig.1 is a diagrammatic cross-sectional view of an iron according to a first embodiment of the electric steaming device, and

Fig.2 is a diagrammatic cross-sectional view of a facial sauna according to a second embodiment of the electric steaming device.

The iron shown in Fig.1 comprises a housing 1, a soleplate 2 attached to the lower side of the housing, an electric heating element 3 for heating the soleplate 2, a water reservoir 4, a steam generator 5, an electric pump 6, and a control device 7. A duct 8 connects the water reservoir 4 to the pump 6 and a duct 9 connects the pump 6 to the steam generator 5. A spray nozzle 10 is provided at the outlet of the duct 9. The steam generator 5 is roof-shaped with sloping sidewalls 11 and a base 12. Edges 13 of the sidewalls 11 are connected to the base 12. The sidewalls may be made of high temperature resistant plastics or composite material. The base may be made of aluminum.

The edges are thermally insulated from the base by means of a gasket 14. The spray nozzle 10 is provided in the apex of the roof-shaped steam generator 5. The steam generator 5 is provided with an outlet 14, which is arranged in a sidewall 11 at a distance above the base 12. The soleplate 2 is provided with a plurality of steam outlet openings 16. A passageway 17 connects the outlet 15 of the steam generator to the steam outlet openings in the soleplate. Part of this passageway is arranged in the soleplate so as to form a steam distribution channel 18. The lower side of the base 12 is provided with one or more resistive tracks 19 of a thick-film printed circuit. The track 19 is electrically insulated from the base 12. Heating of the tracks can be controlled by the control device 7. A heat shield 20 separates the water reservoir 4 and pump 6 from the steam generator 5 and the soleplate 2.

In operation, after powering the iron, the user can start the pump 6 by means of an operating knob 21. Water is pumped from the water reservoir 4 to the nozzle 10. A spray of water 22 is injected onto the heated base 12 of the steam generator 5 for a continuous and instantaneous generation of steam 23. Some of the sprayed water in the form of very fine droplets is mixed with and taken along with the generated steam towards the outlet 16. In this way wet steam 24 is obtained which flows through the passageway 17 and the distribution channel 18 to the steam outlet openings 16. The amount of sprayed water 22 can be controlled by means of the operating knob 21 (or another operating knob) and the control device 7, for example through pulse or duty cycle control of the pump 6. The outlet 15 of the steam generator 5 is arranged at a distance above the base 14 to avoid any dripping of water through the steam outlet openings 16. Tests have shown that, with a thick-film heating element of 1500 W and a surface area of the base 12 of about 42 cm², the steam

production rate is 48 gram per minute, which is much higher than can be obtained by the existing household irons.

A second embodiment of an electric steaming device is shown in Fig.2 and relates to a facial sauna. The facial sauna is constructed for generating and delivering water vapor for treatment of the facial skin. The facial sauna comprises an upper housing part 101 and a base part 102. The upper housing part 101 can be mounted on or removed from the base part 102. A button 103 can be operated for locking or unlocking these parts. A water reservoir 104 and a pump 106 are accommodated in the base part 102. A steam generator 105 is arranged in the housing 101, above the base part 102. A heat shield 120 separates the water reservoir 104 and the pump 106 from the steam generator. A duct 108 connects the water reservoir 104 to the pump 106 and a duct 109 connects the pump 106 to the steam generator 105. A spray nozzle 110 is provided at the outlet of the duct 109. The steam generator 105 has a construction similar to that of the steam generator 5 described in the first embodiment shown in Fig.1. A base 112 of the steam generator 105 is heated by means of a resistive track 119 of a thick-film printed circuit. The steam generator is provided with two outlets 115. Passageways 117 connect the outlets 115 to a chamber 118. The housing 101 is provided with a vapor delivery nozzle 116a having a vapor (steam) outlet opening 116, which communicates with the chamber 118. A condensate receptacle 125 is provided inside the chamber 118. Reference numeral 126 indicates a removable additive cartridge for containing aromatic substances. Aromatic odor escapes through passages 127 in the upper wall of the cartridge and enters the chamber 118 to be mixed with the vapor.

The operation of the facial sauna is similar to that of the steam iron in the previous embodiment. A spray of water 122 is injected onto the heated base 112 of the steam generator 105 to generate steam 123 instantaneously. Some of the sprayed water is mixed with and taken along with the steam towards the outlets 115. The obtained wet steam or water vapor 124 enters the chamber 118 and flows to the outlet opening 116 of the vapor delivery nozzle 116a. The amount of vapor and how much water is mixed with the steam depends on the power of the heating track 119 and on amount of water sprayed 122 onto the base 112. It might happen that vapor condenses in the chamber 118. This condensate is collected in the receptacle 125. This receptacle can be emptied when the upper housing part 101 is removed.

CLAIMS:

1. Electric steaming device comprising a housing, a steam generator (5;105) having a base (12;112), heating means (19;119) for heating said base of the steam generator, a water reservoir (4;104), at least one steam outlet opening (16;116), means (6;10;106,110) for feeding water from the water reservoir into the steam generator, and at least one passageway (17,117) for conveying steam from the steam generator (5;105) toward the at least one steam outlet opening (16;116), characterized in that the means for feeding water into the steam generator comprises a spray nozzle (10;110) for spraying water onto the base (12;112) of the steam generator (5;105).
2. Electric steaming device as claimed in claim 1, characterized in that the heating means for heating the base (12;112) of the steam generator (5;105) comprises a resistive track (19;119) of a thick-film printed circuit.
3. Electric steaming device as claimed in claim 1 or 2, characterized in that the means for feeding water into the steam generator (5;105) comprises an electric pump (6;106).
4. Electric steaming device as claimed in claim 1, 2 or 3, characterized in that the device is a steam iron with a soleplate (2), heating means (3) for heating the soleplate (2), and a plurality of steam outlet openings (16) provided in the soleplate (2), and in that the passageway (17) for conveying the generated steam to the steam outlet openings (16) comprises at least one steam distribution channel (18) provided in the heatable soleplate (2).
5. Electric steaming device as claimed in claim 1, 2 or 3, characterized in that the device is a facial sauna.

1/2

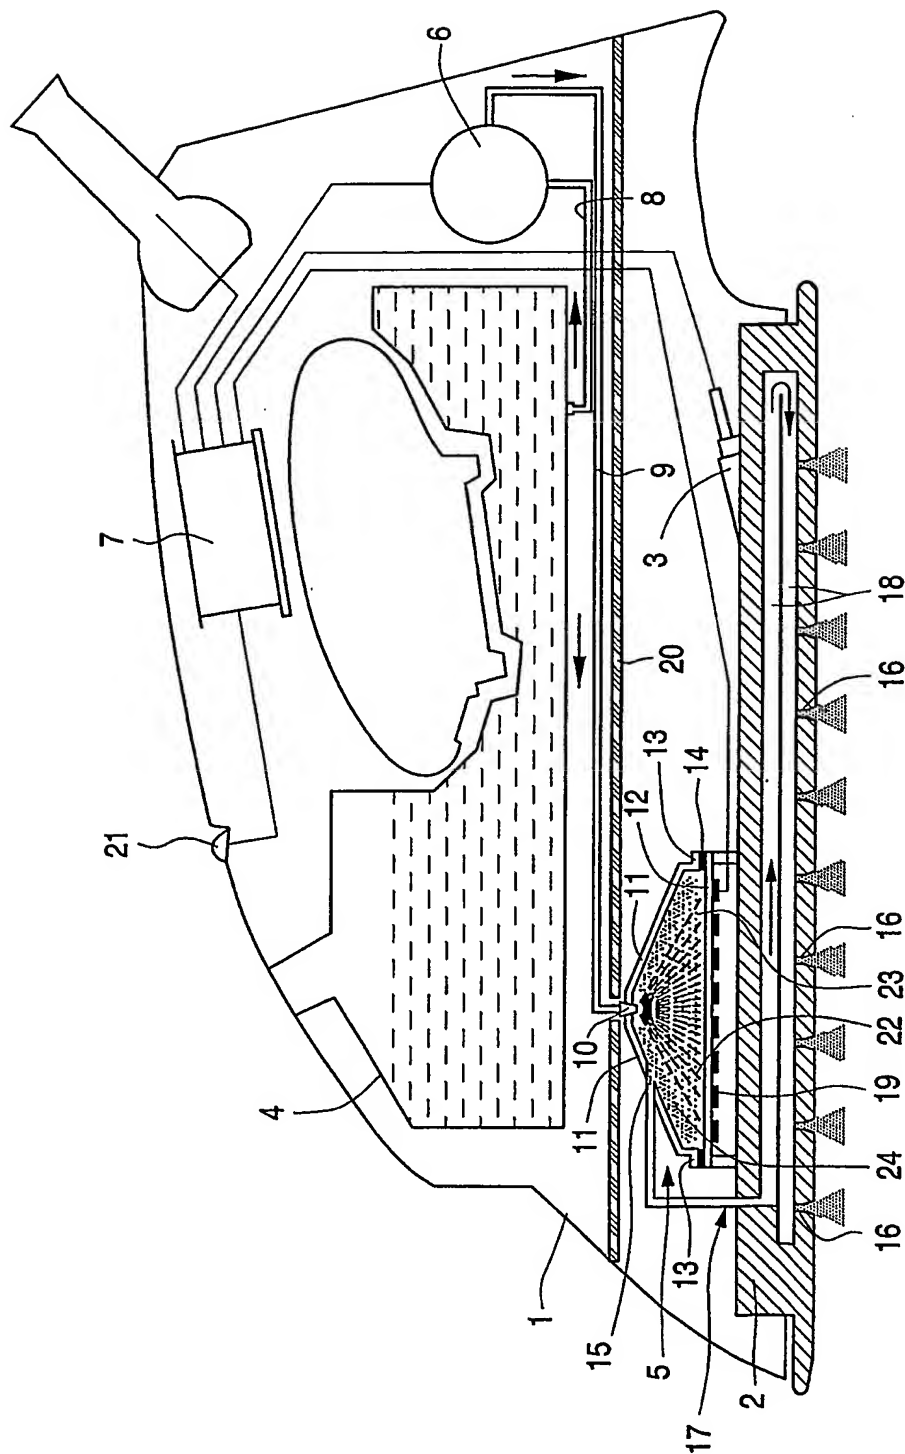


Fig.1

2/2

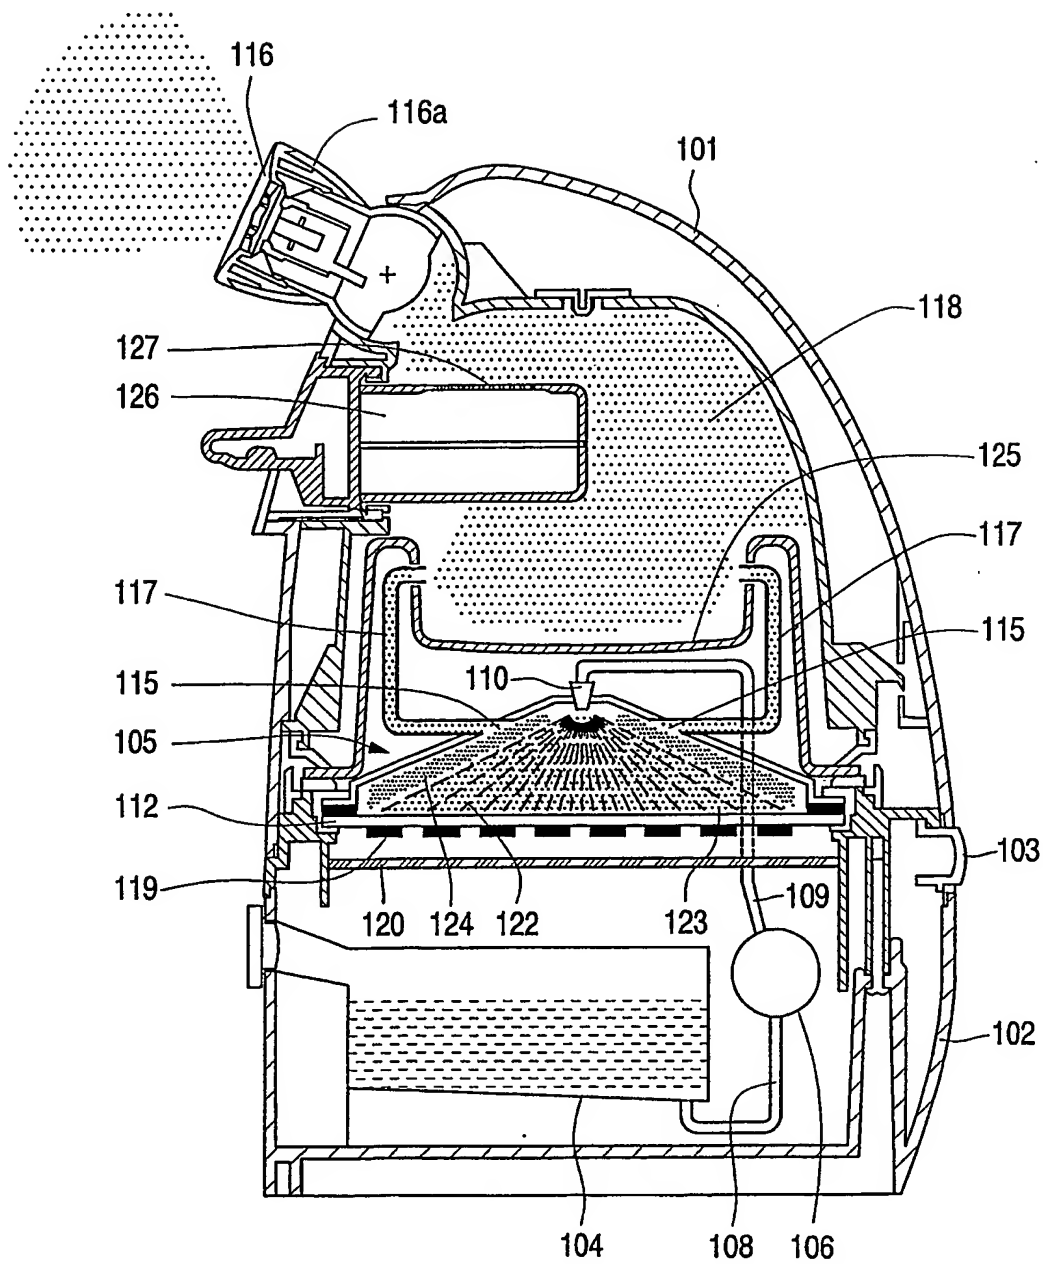


Fig.2

INTERNATIONAL SEARCH REPORT

Interr I Application No

PCT/IB 03/03714

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 F22B1/28 D06F75/14 A61H33/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F22B D06F A61H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 1 580 293 A (FITZER LOUIS A) 13 April 1926 (1926-04-13) page 1, line 54 - line 103; figures ---	1,3
X	EP 1 147 729 A (EUGSTER FRISMAG AG) 24 October 2001 (2001-10-24) column 3, line 42 -column 4, line 53; figures ---	1,3
X	DE 35 12 370 A (VEIT GMBH & CO) 16 October 1986 (1986-10-16) page 7, line 5 -page 9, line 31; figures ---	1,3
X	DE 29 46 447 A (WIECHERT HELMUT) 27 May 1981 (1981-05-27) page 3; figure 1 ---	1,3
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

7 November 2003

Date of mailing of the international search report

14/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Van Gheel, J.

INTERNATIONAL SEARCH REPORT

Intern Application No

PCT/IB 03/03714

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 248 813 A (QUICK CARL F) 3 May 1966 (1966-05-03) column 8, line 19 - line 29; figures ----	2
A	US 5 642 579 A (NETTEN ADRIAAN ET AL) 1 July 1997 (1997-07-01) column 7, line 12 - column 8, line 10; figures ----	2-4
A	DE 42 14 564 C (ROWENTA) 2 September 1993 (1993-09-02) column 2, line 8 - line 66; figure 1 ----	4
A	DE 196 14 511 C (ROWENTA WERKE GMBH) 23 January 1997 (1997-01-23) column 2, line 8 - line 66; figure 1 -----	4

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inten al Application No

PCT/IB 03/03714

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 1580293	A	13-04-1926	NONE	
EP 1147729	A	24-10-2001	EP 1147729 A1 US 2001032599 A1	24-10-2001 25-10-2001
DE 3512370	A	16-10-1986	DE 3512370 A1	16-10-1986
DE 2946447	A	27-05-1981	DE 2946447 A1	27-05-1981
US 3248813	A	03-05-1966	NONE	
US 5642579	A	01-07-1997	BR 9603892 A CN 1148420 A , B DE 69608174 D1 DE 69608174 T2 EP 0753091 A1 WO 9623098 A1 JP 9510904 T	07-10-1997 23-04-1997 15-06-2000 14-12-2000 15-01-1997 01-08-1996 04-11-1997
DE 4214564	C	02-09-1993	DE 4214564 C1 CH 687392 A5 FR 2690932 A1 GB 2266729 A , B HK 96196 A IT 1264372 B1 JP 2032128 C JP 6071099 A JP 7061399 B NL 9300781 A , B, US 5341585 A	02-09-1993 29-11-1996 12-11-1993 10-11-1993 14-06-1996 23-09-1996 19-03-1996 15-03-1994 05-07-1995 01-12-1993 30-08-1994
DE 19614511	C	23-01-1997	DE 19614511 C1 FR 2747403 A1 IT MI970805 A1	23-01-1997 17-10-1997 13-10-1997